

## PRODUCT DETAILS

BIANCO NXT PRO is a single pump, dual mode, digital, electronic pump controller.

The PRO controller has a number of optional advanced features but out of the box, the NXT PRO is simple to use.

### Mode 1. (Default) Pressure controller

Starts as pressure falls to a user adjustable level.

Stops when flow falls to less than 1 l/min.

### Mode 2. Pressure switch (requires pressure tank)

Starts and stops according to user adjustable settings

With full push-button programming, NXT PRO has a digital display to provide information about the running state of the pump

## APPLICATIONS

- Control of pressure pumps up to 2.2kW (16 amp)
- Suitable for clean, non-volatile liquids without fibres or solids including potable water

## ADVANCED FEATURES


- Swivel unions - 1" or 1 1/4" BSPM
- Pump Protections: Dry run, Low flow, Frequent start, Underload, Overload, Over pressure, Anti-seize, Maximum continuous run time
- No reactive metal parts in contact with the water
- Generator compatible
- Removable pressure accumulator exposes 1" BSPF port

## TECHNICAL DATA

INPUT VOLTAGE	80 - 260 AC 1 Phase
MAX. WORKING TEMP	35 deg C
MAX TEMP	60 deg C
MAX RATED PRESSURE	10 bar
MAX RATED FLOW	1" Port: 150 l/m @ 0.8 bar loss 1 1/4" Port: >350 l/m @ 0.8 bar loss
INLET/OUTLET	1" BSPM / 1" BSPM (std)
NET WEIGHT	2.1kg



MAXIMUM CURRENT	16 Amps
NOMINAL PUMP POWER	2.2 kW
INGRESS PROTECTION	IP65
AUTOMATIC	Yes, with dry run protection
DEFAULT START PRESSURE	2.2 bar - adjustable
POWER CABLE	1.5m H05, 10 amp plug
PACKAGING DIMENSIONS	220 x 230 x 200

## CURVE

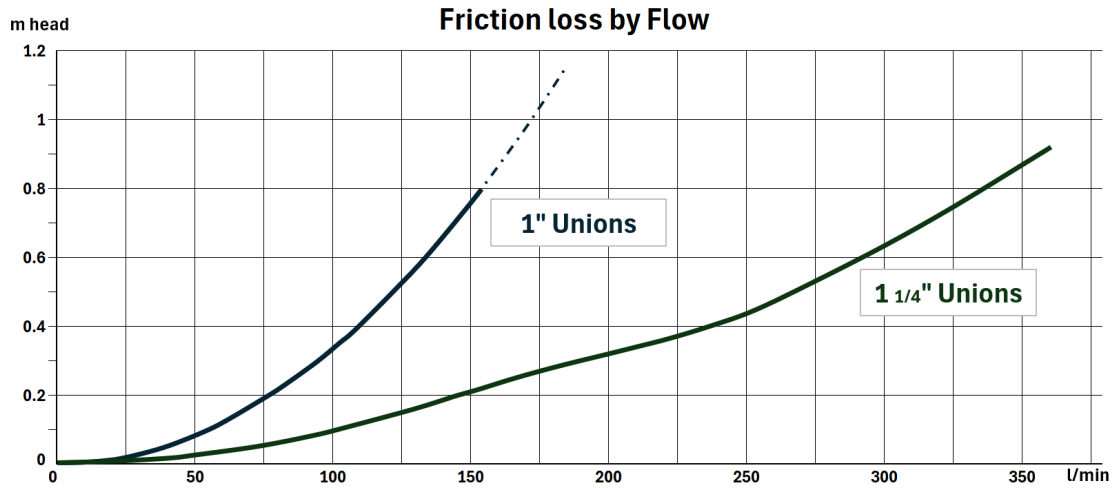

## DIMENSIONS

DIMENSIONS	
H 1	212mm
H 2	115mm
W 1	175mm
W 2	152mm
W 3	57mm
L 1	261mm
L 2	93mm
L 3	168mm
L 4	(121mm)

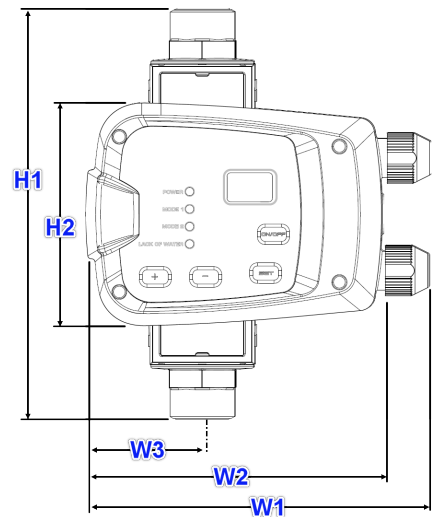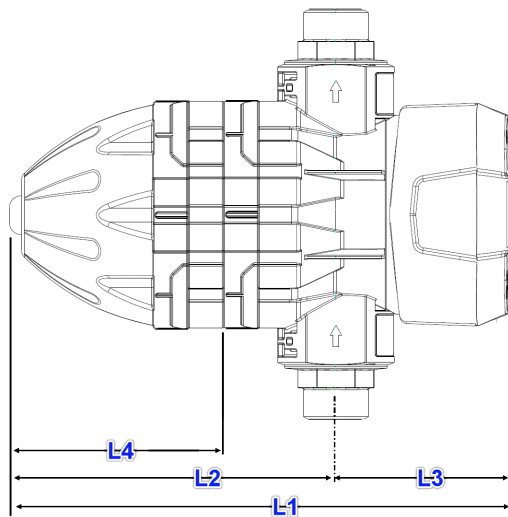

## WARRANTY / CERTIFICATIONS

